


● **FEATURES 特性**

1. Round middle column, no bobbin design for maximum space utilization and high power density;
2. The shell can be made of aluminum or other metal, filled with thermal glue for better heat dissipation;
3. High standard design, meet AEC-Q200 reliability standard;
4. Operating Temp. : -40°C ~ +125°C (Including self-heating).


● **APPLICATIONS 用途**

1. High power AC-DC converter;
2. Widely used in automotive electronics, photovoltaic products, high power adapters.
3. We can customize products according to your requirements. Please consult our sales.

● **PART NUMBERING SYSTEM 品名系统**

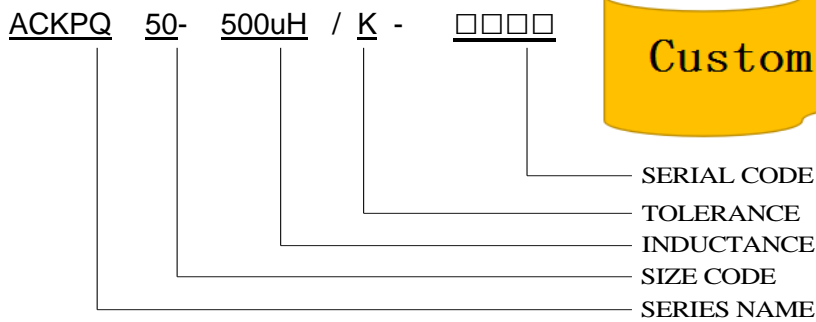

● **SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)**

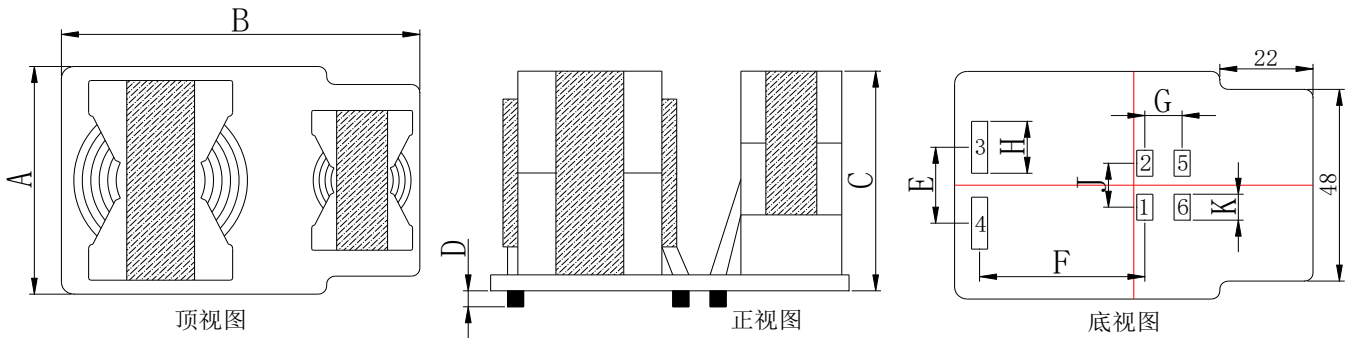

TYPE(型号)	A	B	C	D	E	F	Power(W) Ref
ACKPQ50	58.0Max	86.0Max	56.0Max	5.0±0.5	19.0±0.5	39.0±0.5	2000
ACKPQ65	73.0Max	99.0Max	70.0Max	5.0±0.5	29.0±0.5	49.0±0.5	4000
ACKPQ80	88.0Max	116.0Max	72.0Max	5.0±0.5	39.0±0.5	59.0±0.5	8000